

Central Texas Metal Roofing Supply Co., Inc.

Description


The ShurLoc 150 is an architectural standing seam roof system that snaps together with no mechanical seaming required. The ultra thin rib is aesthetically appealing yet strong, providing excellent resistance to wind uplift. Panels are designed for application solid substrates like plywood or metal decking. One-piece clips allow for unlimited thermal movement.

Features

- 1 1/2" nominal height.
- 14 1/2", 15", 16", 18" widths.
- Striated pan standard; Optional smooth without striations.
- One piece clip.
- Snap together seam.
- Minimum 3:12 pitch recommended.

Performance / Testing

- UL 580 Class 90 Wind Uplift Rated.
- UL 2218 Class 4 Impact Rated.
- UL 790 Class A Fire Rated.

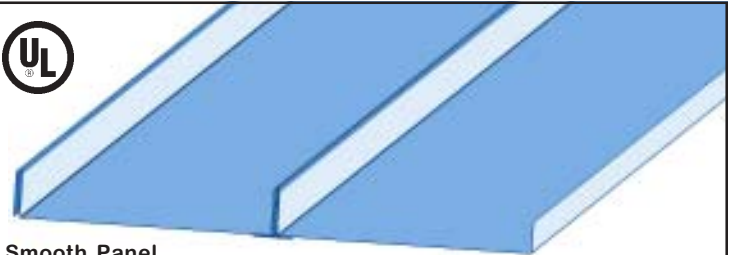

Smooth Panel



Striated Panel



Substrates

- 26, 24, 22 Ga Acrylic Coated Galvalume.
- 26 Ga SMP Color Finish.
- 24 Ga Kynar500 Color Finish.
- 26 & 24 Ga Paint Grip.
- 16 & 20 oz. Copper.
- .032 & .040 Aluminum, Anodized or Kynar500 Color Finish.

Austin

830 Sagebrush Drive Austin, Texas 78758
 (512) 452-1515 (800) 428-7412
 Fax (512) 833-7499

www.ctmrs.com

email: info@ctmrs.com

Seguin

720 West IH 10 Seguin, Texas 78155
 (830) 379-3600 (877) 622-8677
 Fax (830) 379-8753