

Central Texas Metal Roofing Supply Co., Inc.

## Description


Spanloc150 is mechanically seamed, architectural, standing seam panel, which combines a traditional thin rib profile appearance, superior weather tight capability, and exceptional resistance to wind uplift. Spanloc150 is designed to be applied over solid substrate or open frame as a roof, mansard, or fascia. Optional expansion clip allows for thermal expansion and contraction of the panel. Tapered panels are available up to 29' length. SpanLoc150 panel can be curved to a convex radius as small as 10 feet for curved roof application.

## Features


- 1 1/2" nominal seam height.
- 16 1/2" panel width.
- Striated pan standard; Optional smooth without striations.
- Mechanically seamed.
- Minimum 3:12 pitch recommended.
- Optional factory applied sealant in female panel rib.

## Performance / Testing

- UL 580 Class 90 Wind Uplift Rated.
- UL 2218 Class 4 Impact Rated.
- UL 790 Class A Fire Rated.
- Florida Approved FL5107.

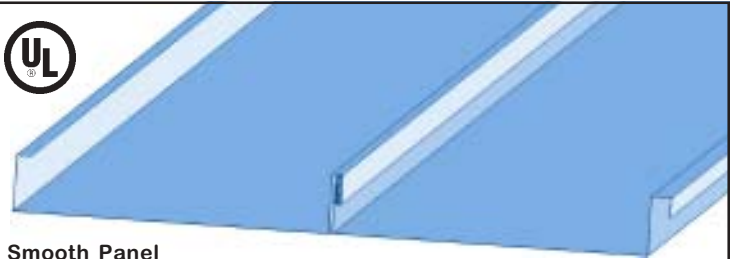

Smooth Panel



Striated Panel



## Substrates

- 26, 24, 22 Ga Acrylic Coated Galvalume.
- 26 Ga SMP Color Finish.
- 24 Ga Kynar500 Color Finish.
- 26 & 24 Ga Paint Grip.
- 16 & 20 oz. Copper.
- .032 & .040 Aluminum, Anodized or Kynar500 Color Finish.

### Austin

830 Sagebrush Drive Austin, Texas 78758  
 (512) 452-1515 (800) 428-7412  
 Fax (512) 833-7499

www.ctmrs.com

email: info@ctmrs.com

### Seguin

720 West IH 10 Seguin, Texas 78155  
 (830) 379-3600 (877) 622-8677  
 Fax (830) 379-8753